

IC-4088S



Rugged
MIL-STD 810



<Actual size>

Professional Quality & Performance Rugged Splash Resistant Construction

- 40 UHF CB channels with 8 repeater channels
- New high performance antenna, up to 3km "line of site"
- 500mW transmit power
- Uses inexpensive AA batteries
- Only 500mA current drain for extended battery life
- CTCSS group mode for silent stand by
- Voice scrambler for extra privacy
- Unique automatic in range and missed call indicator with 2nd unit
- Large range of quality Icom accessories
- 2 year factory warranty, when purchased in Australia

**NO
LICENCE
REQUIRED**

SPECIFICATIONS

- Number of channels : 40 UHF CB Channels (476.425–477.400MHz)
- Mode : FM
- Frequency stability : ±3.0kHz
- Frequency resolution : 25kHz
- Battery requirements : 3 × AA (R6) alkaline cells ; or optional BP-202
- External power supply : 6.0V DC ±5%
- Current drain (at 4.5V DC) : Less than 500mA
- Operating Temp. range : 0°C to +55°C
- Number of CTCSS freq. : 38 (67.0–250.3Hz)
- Weight (approx.) : 200g (includes 3 alkaline cells)
- Output power : 500mW ±20%
- External MIC connector : 3-conductor 2.5 (d) mm/ 2.2kΩ
- Sensitivity (12dB SINAD) : 0.158µV typical
- Audio output power : More than 100mW at 10% distortion with an 8Ω load
- External SP connector : 3-conductor 3.5 (d) mm/ 8Ω

- Battery life (Tx:Rx:Standby=1:1:8) :

Battery type	Battery life
3 alkaline cells	approx. 28 hrs.
Optional BP-202	approx. 10 hrs.

- Communication range* : Up to 3km (approx.) (Wide, open space)


* Communication range may differ depending on weather conditions, etc.

Applicable U.S. Military Specifications

Icom makes rugged products that meet MIL-STD requirements and strict environmental standards as follows.

Standard	MIL 810 C		MIL 810 D		MIL 810 E		MIL 810 F	
	Method	Proc.	Method	Proc.	Method	Proc.	Method	Proc.
Low Pressure	500.1	I	500.2	I, II	500.3	I, II	500.4	I, II
High Temp.	501.1	I	501.2	I, II	501.3	I, II	501.4	I, II
Low Temp.	502.1	I	502.2	I, II	502.3	I, II	502.4	I, II
Temp. Shock	503.1	I	503.2	I	503.3	I	503.4	I
Solar Radiation	505.1	I	505.2	I	505.3	I	505.4	I
Rain	506.1	I, II	506.2	I, II	506.3	I, II	506.4	I, II
Humidity	507.1	I, II	507.2	II, III	507.3	II, III	507.4	—
Salt Fog	509.1	I	509.2	I	509.3	I	509.4	—
Dust	510.1	I	510.2	I	510.3	I	510.4	I
Vibration	514.2	VIII, X	514.3	I	514.4	I	514.5	I
Shock	516.2	I, II, V	516.3	I, IV	516.4	I, IV	516.5	I, IV

DIMENSIONS

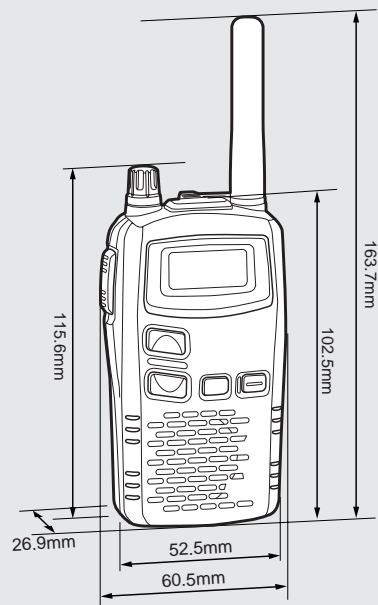

N33

This device complies with Standard Australia Specification No. AS/NZS4365-1996.

All stated specifications are subject to change without notice or obligation.

OPTIONS

BP-202 Ni-Cd BATTERY CELL ASSEMBLY

Install into the battery cell space in the transceiver. 3.6V/700mAh

CP-18 CIGARETTE LIGHTER CABLE

6V DC, 2A output from 12V cigarette lighter socket with internal DC-DC converter.

BC-119N DESKTOP CHARGER + BC-145V AC ADAPTER + AD-105 CHARGER ADAPTER

Rapidly charges installed Ni-Cd battery cell assembly, BP-202. The charger adapter and the AC adapter supplied with the BC-119N depending on version. Charging time: 75 to 85 min.

HM-128 EARPHONE-MICROPHONE

Light weight earphone-microphone. PTT switch clips to your lapel.

SPEAKER-MICROPHONES

- HM-46** : Compact and lightweight. Equipped with an earphone jack.
- HM-75A** : Allows you to remotely select operating channels, etc.
- HM-131** : Durable body. Equipped with an earphone jack and revolving clip.

HEADSETS

- HS-85** : For hands-free operation. Includes VOX, PTT and "one-touch" PTT with a time-out timer.
- VS-1** : PTT/VOX unit. Required when using the HS-94, HS-95 and HS-97 with the transceiver.
- HS-94** : Earhook headset with flexible boom microphone.
- HS-95** : Behind-the-head headset with flexible boom microphone.
- HS-97** : Throat microphone fits around your neck comfortably.

Icom (Australia) Pty. Ltd.

Your local distributor/dealer:

Unit 1 / 103 Garden Road, Clayton, VIC 3168, Australia
 Phone : +61 (03) 9549 7500
 Fax : +61 (03) 9549 7505
 E-mail : sales@icom.net.au
 URL : <http://www.icom.net.au>